



ATyS C25

ATS Controller

entry-level functionalities

Transfer switches

new



ATyS C25

The solution for

- > ATS panels
- > Compact transfer enclosures
- > Basic ATS controls



Strong points

- > Self-supplied from sensing circuit
- > Integrated AC Double Power Supply
- > RS485 Communications
- > Multiple mounting options

Conformity to standards

- > IEC 61010-2-201
- > IEC 60947-6-1
- > GB/T 14048.11 Annex C



Function

ATyS C25 is an entry level ATSE controller with communications. It can be used to pilot a remotely operated transfer switch, such as ATyS r, ATyS S and ATyS d M, as well as contactors. ATyS C25 ensure the automatic or remotely controlled transfer from one source to another with fixed timers and thresholds.

Advantages

Flexible space saving

The ATyS C25 controller can be mounted on either a DIN rail or to the panel door, offering flexibility and optimising space.

Cost-effective

The ATyS C25 has an integrated DPS, for supplying the motorisation of the switch, and can be door mounted, therefore there's no need for an external DPS or display, reducing installation time and costs.

Fast commissioning & testing

- 8 dip-switches allow very fast commissioning, even offline.
- All main functions such as remote position control, mode selection, lamp test and genset test on load are available on the front of the product allowing quick and easy operation.
- Remote product information is available through RS485 Modbus communication.


General characteristics

- Self-powered from sensing.
- Voltage supply range (184 - 300 VAC).
- 24 VDC aux power supply (for optional use).
- Main/Main or Main/Genset networks.
- Fixed I/Os.
- RS485 Modbus communication.
- Voltage sensing on all phases.
- Three-phase + Neutral & Single-phase + Neutral networks.
- Phase rotation checking.
- Door or DIN rail mounting.


References

| Description | Reference |
|---------------------------|-----------|
| ATyS C25 – ATS controller | 1600 0025 |

Front panel

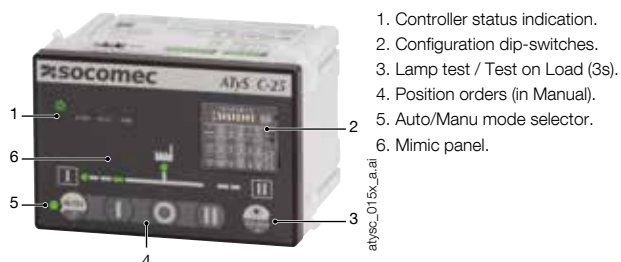

Dimensions (mm)

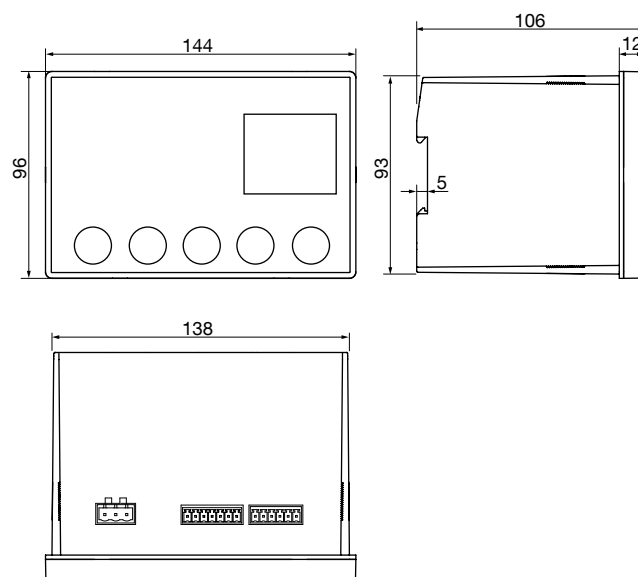

atysc_001_b_1_x_cat.ai

Characteristics

Electrical characteristics

| | |
|----------------------|--|
| AC operating limits | 184 ⁽¹⁾ - 300 VAC |
| Optional DC supply | 24 VDC |
| Frequency limits | 45 - 65 Hz |
| Power consumption | < 10 W |
| Inputs | 5 - fixed (auto inhibit & 24 VDC fire input, position indication I-O-II) |
| Outputs | 4 - fixed (position control I-O-II & genset start) |
| Impulse withstand | 6/4 kV ⁽²⁾ |
| Overvoltage category | CAT 3 |

Mechanical characteristics

| | |
|-----------------------|---------------|
| Weight | 845 gr |
| Door cutout | 138 x 93 mm |
| Operating temperature | -25 ... +60°C |


Communications

| | |
|----------------|---------------------------------|
| Interface type | RS485. 2 to 3 half duplex wires |
| Protocol | MODBUS RTU |
| Baudrate | 38400 |

(1) 190 VAC in contactor mode.

(2) 6 kV tested between phases of a different source and 4 kV tested between phases of a the same source.

Terminals

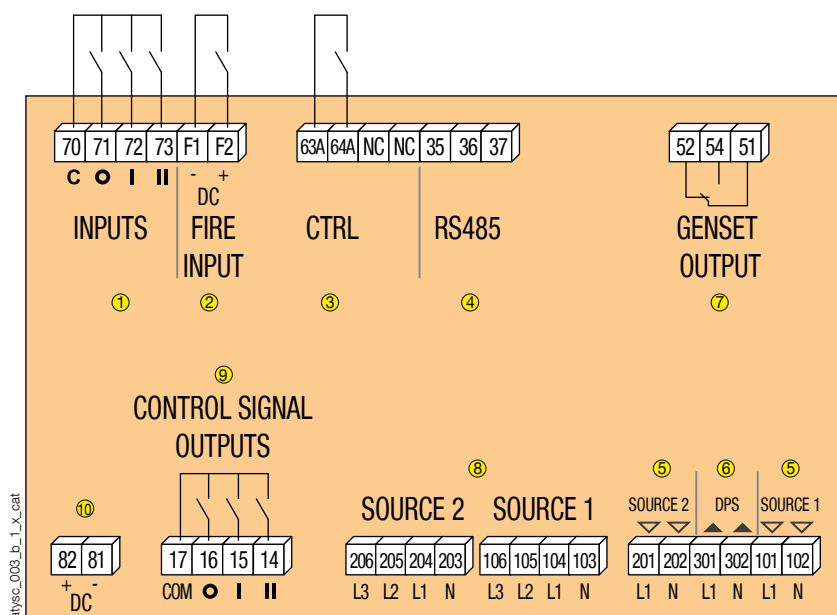

1. Switch position inputs
2. 24 VDC fire input (forces 0 & inhibit)
3. Control inputs
4. RS485 communication
5. DPS input (source 1 and 2)
6. DPS output to motor
7. Genset NO/NC output
8. Voltage sensing S1 & S2
9. Control outputs to transfer device
10. 24 VDC aux power supply (for optional use)